
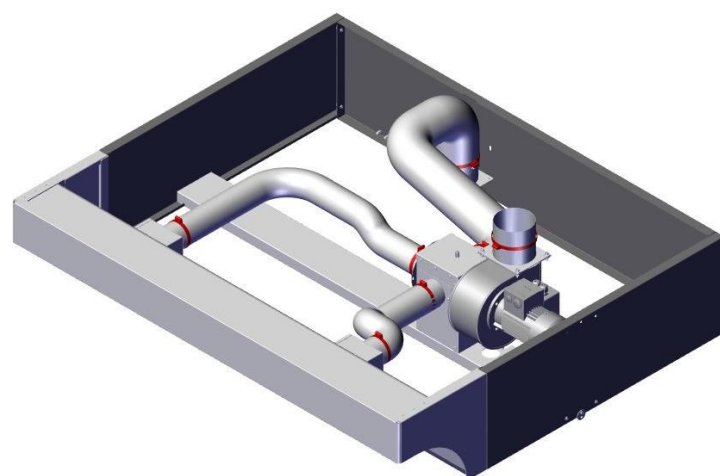


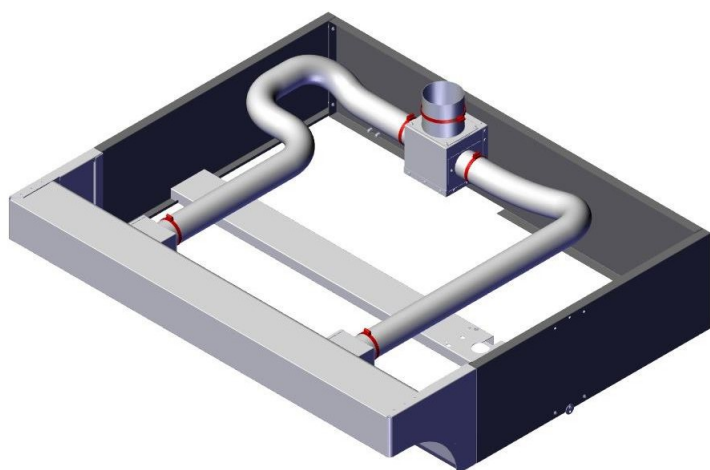

OKAPY OEM

mod. 30/35/40 NEUTRALNE





mod. 30/35/40 Z WYCIĄGIEM

4.4 Dane techniczne

DANE DOTYCZĄCE ZASILANIA OKAPÓW Z WYCIĄGIEM





Napięcie	400V (1~+ PE)
Częstotliwość	50 Hz
pobór prądu	1,9 A
Średnie zużycie	-
Moc	0,25 kW

model 30 NEUTRAL

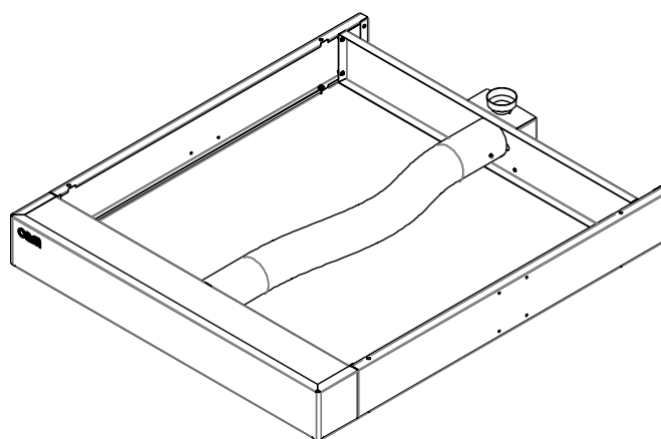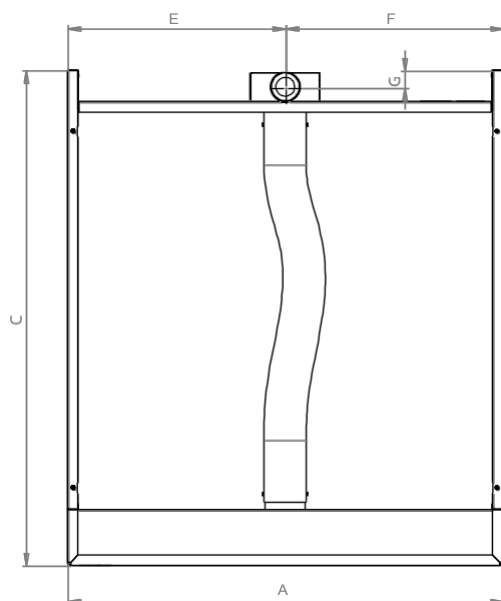





MODELLO	TIPO	A	B	C	D	E	F	G	H
430	NEUTRALNY	882	170	933	771	441	441	50	212
630L	NEUTRALNY	1196	170	933	771	598	598	50	212
630S	NEUTRALNY	882	170	1233	1071	441	441	50	212
930	NEUTRALNY	1196	170	1233	1071	598	598	50	212

model 30 Z WYCIĄGIEM

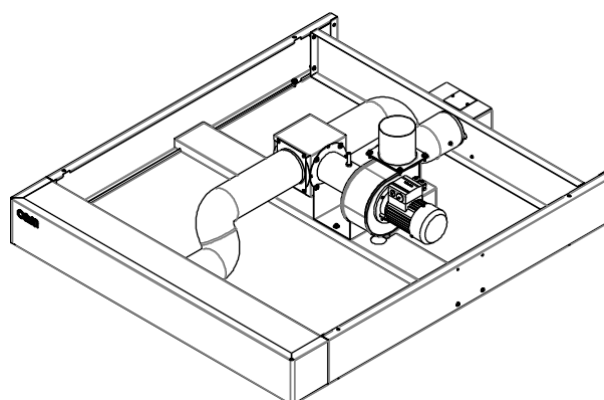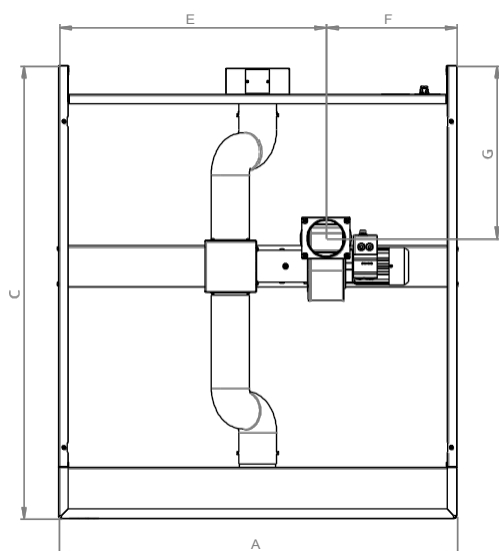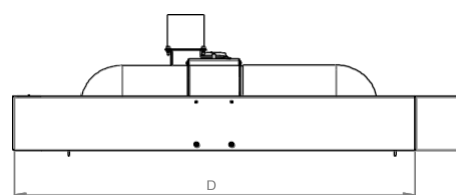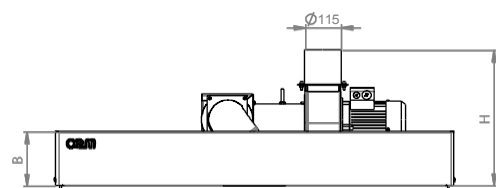


MODEL	TYP	A	B	C	D	E	F	G	H
430	Z WYCIĄGIEM	882	170	933	771	573	309	367	434
630L	Z WYCIĄGIEM	1196	170	933	771	887	309	367	434
630S	Z WYCIĄGIEM	882	170	1233	1071	573	309	448	434
930	Z WYCIĄGIEM	1196	170	1233	1071	887	309	448	434

model 35/40 NEUTRALNY

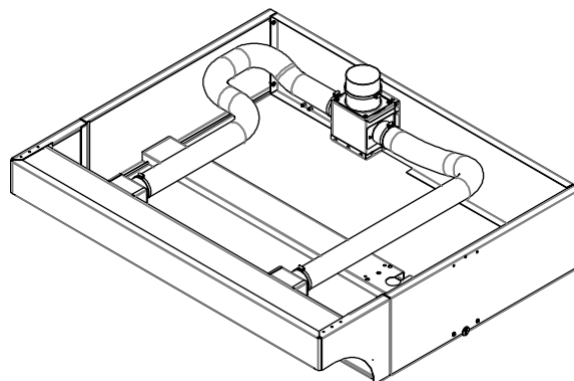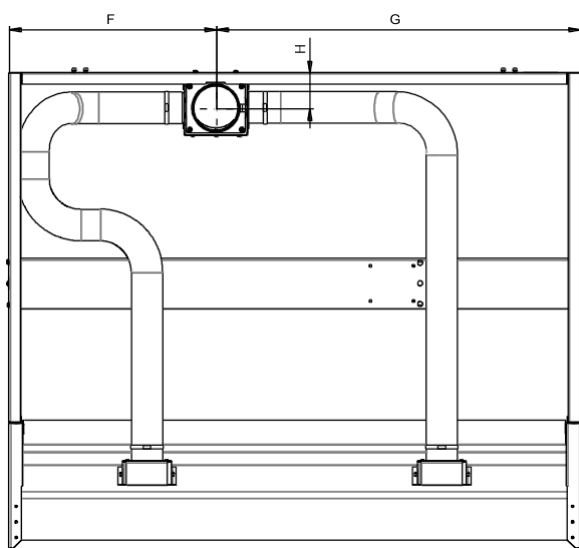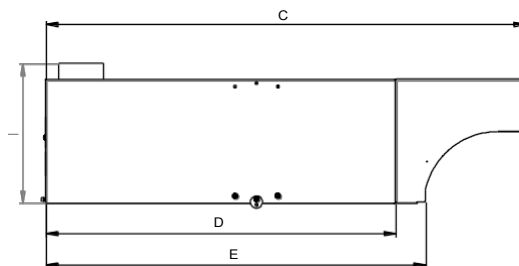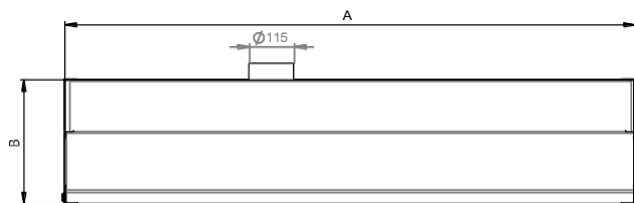

MODEL	TYP	A	B	C	D	E	F	G	H	I
435	NEUTRALNY	1083	316	1226	895	971	340	743	91	356
635L	NEUTRALNY	1460	316	1226	895	971	529	931	91	356
635S	NEUTRALNY	1083	316	1576	1245	1321	340	743	91	356
935	NEUTRALNY	1460	316	1576	1245	1321	529	931	91	356
440	NEUTRALNY	1168	316	1326	995	1071	383	785	91	356
640L	NEUTRALNY	1588	316	1326	995	1071	593	995	91	356
640S	NEUTRALNY	1168	316	1746	1415	1491	383	785	91	356
940	NEUTRALNY	1588	316	1746	1415	1491	593	995	91	356



model 35/40 Z WYCIĄGIEM

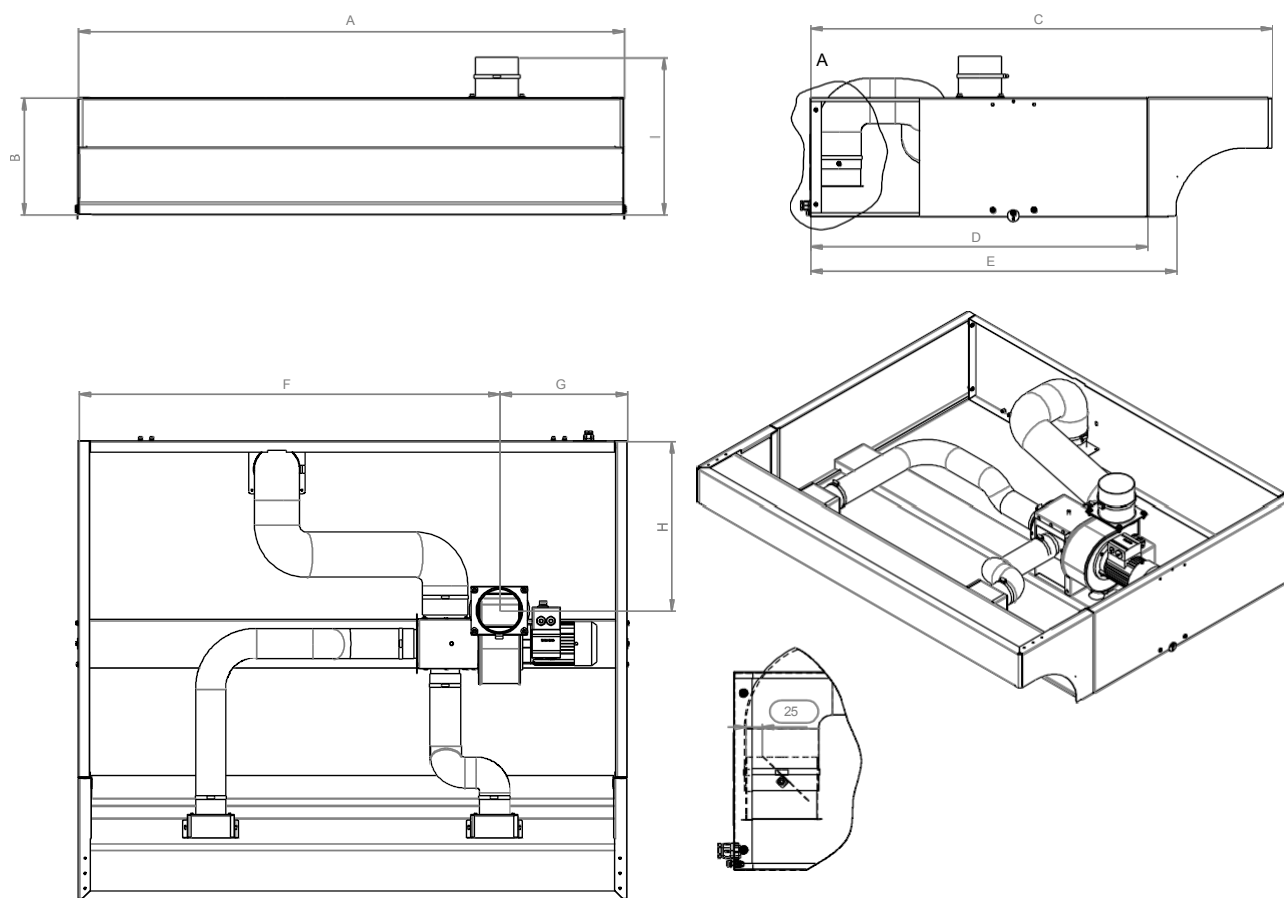

MODEL	TYP	A	B	C	D	E	F	G	H	I
435	Z WYCIĄGIEM	1083	316	1226	895	971	744	339	452	425
635L	Z WYCIĄGIEM	1460	316	1226	895	971	1120	339	452	425
635S	Z WYCIĄGIEM	1083	316	1576	1245	1321	744	339	527	425
935	Z WYCIĄGIEM	1460	316	1576	1245	1321	1120	339	527	425
440	Z WYCIĄGIEM	1168	316	1326	995	1071	829	339	552	425
640L	Z WYCIĄGIEM	1588	316	1326	995	1071	1249	339	552	425
640S	Z WYCIĄGIEM	1168	316	1746	1415	1491	829	339	697	425
940	Z WYCIĄGIEM	1588	316	1746	1415	1491	1249	339	697	425

Główne komponenty - okap neutralny

POS.	OPIS
1	Panele boczne
2	Kolektor przedni
3	Łącznik
4	Rury spiro

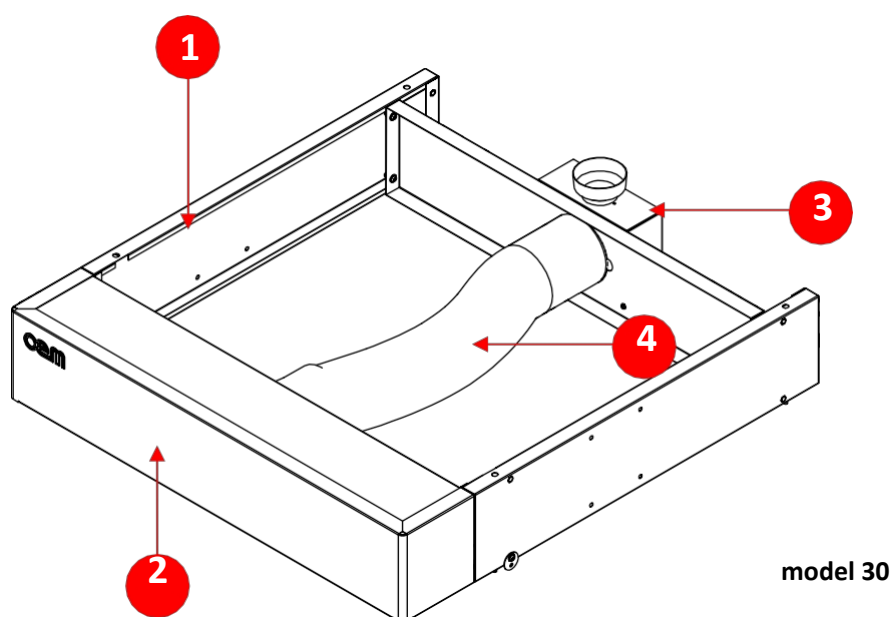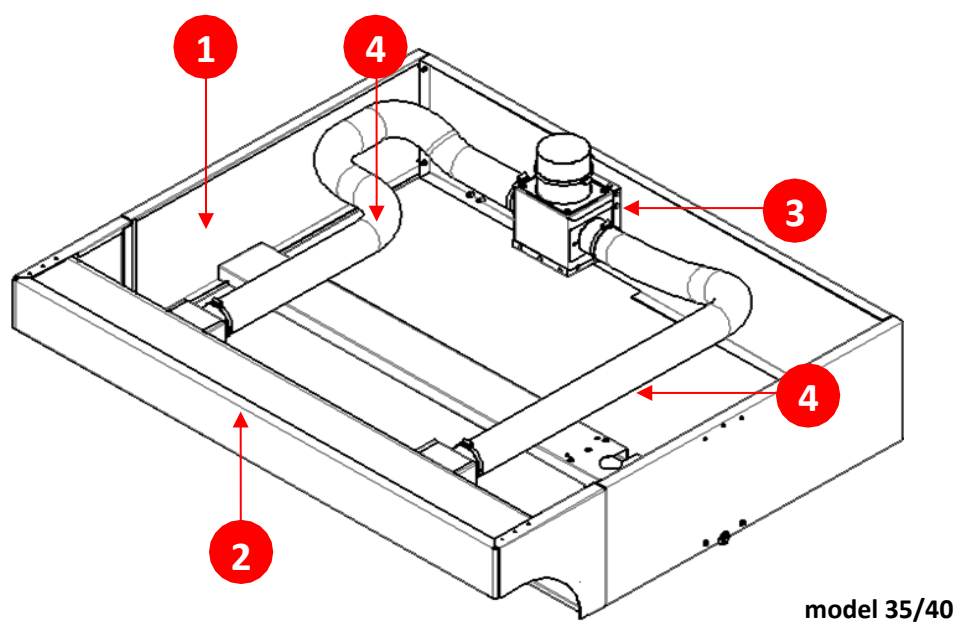

Główne komponenty - okap z wyciągiem

POS.	DESCRIZIONE
1	Panele boczne
2	Kolektor przedni
3	Silnik
4	Rury spiro
5	Panel sterowania
6	Zawór

